

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 December 2000 (14.12.2000)

PCT

(10) International Publication Number
WO 00/76078 A1

(51) International Patent Classification⁷: H04B 1/52, 1/12

(74) Agent: VAN STRAATEN, Joop; Octrooibureau van Straaten B.V., Waalreseweg 17, NL-5554 HA Valkenswaard (NL).

(21) International Application Number: PCT/EP00/04993

(22) International Filing Date: 29 May 2000 (29.05.2000)

(81) Designated States (national): AE, AG, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(25) Filing Language: English

(26) Publication Language: English

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(30) Priority Data:
99201803.6 8 June 1999 (08.06.1999) EP


Published:

— With international search report.

(71) Applicant (for all designated States except US): SEMICONDUCTOR IDEAS TO THE MARKET (ITOM) B.V. [NL/NL]; Drielindendreef 53, NL-4389 AH Breda (NL).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: COMMUNICATION DEVICE

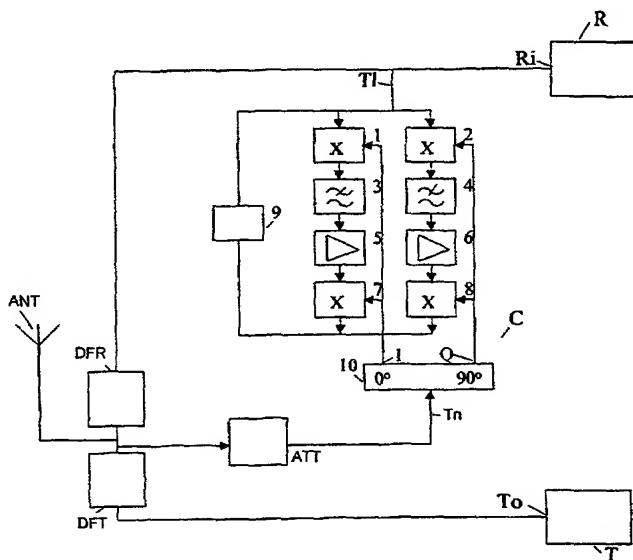

(57) Abstract: Communication device comprising a transmitter and a receiver, coupled to antenna means respectively via a transmitter output and a receiver input. For an effective and reliable reduction of transmitter leakage signals occurring at the receiver input corrective signal means are being used, comprising transmitter leakage signal selective amplifying means for selectively amplifying said transmitter leakage signal provided with a transmitter signal reference input being coupled to the transmitter output, a transmitter leakage signal input being coupled to the receiver input and a transmitter leakage signal output being coupled to said transmitter leakage signal input for a negative feed back of said transmitter leakage signals.